

MP2-R

230VAC

PERISTALTIC PUMP WITH ON/OFF TRIMMER 0-100%

DESCRIPTION

- Peristaltic pump with adjustable flow rate by trimmer
- Reinforced PP body
- Polycarbonate front panel
- Standard 230 Vac Power Supply
- 0-100% speed regulation
- 100 % Made in Italy
- CE approved

OPTIONAL

- ON / OFF switch
- SCHUKO plug



TECHNICAL SPECIFICATIONS

Standard	Max l/h	Pressure		Max cc / min	Tube	Tube dimension s	Pump Head	Power [Watt]	RPM	Weight	
		Bar	PSI							kg.	Lbs
VERSION 230 Vac											
1,5- 01	1,5	01	14,7	25	Santoprene	5,8 x 9,4	PP	35	10	0,5	1,2
04- 01	04	01	14,7	66,67	Santoprene	5,8 x 9,4	PP	35	30	0,5	1,2
06- 01	06	01	14,7	100	Santoprene	5,8 x 9,4	PP	35	50	0,5	1,2
01- 03	01	03	44,1	16,67	Silicone	5 x 10	PP	35	10	0,5	1,2
02- 03	02	03	44,1	33,33	Silicone	5 x 10	PP	35	20	0,5	1,2
01- 02	1,7	02	29,4	28,33	Tygon	6,4 x 9,5	PP	35	10	0,5	1,2
01- 03	01	03	44,1	16,67	Santoprene	4,8 x 9,6	PP	35	10	0,5	1,2
02- 03	2	03	44,1	33,4	Santoprene	4,8 x 9,6	PP	35	20	0,5	1,2




MP2-R
230VAC



PERISTALTIC PUMP WITH ON/OFF TRIMMER 0-100%

PUM VIEW (MM)

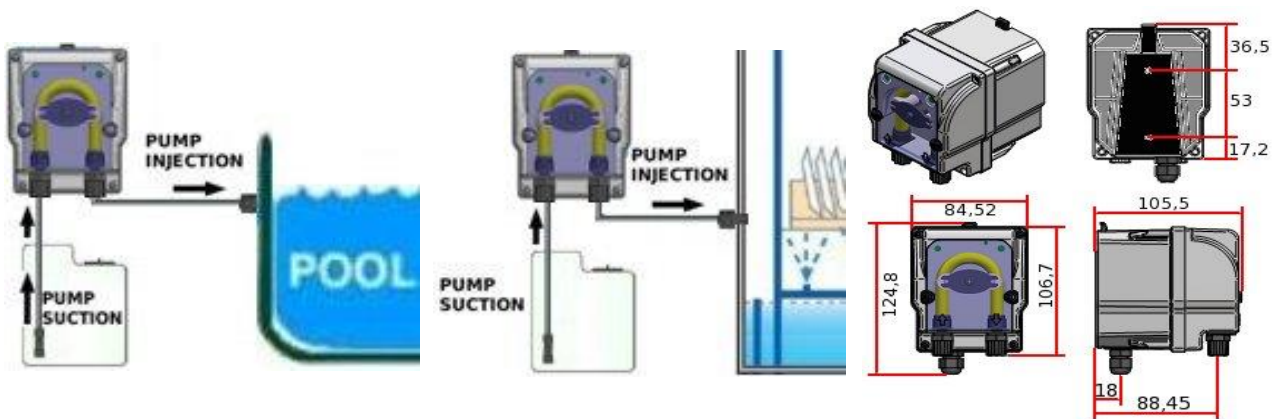

Dosita S.r.l.

www.dosita.com - info@dosita.com

e-shop: www.trattamento-acque.net - info@trattamento-acque.net