

### PERISTALTIC PUMP WITH ON/OFF TRIMMER 0-100%

#### DESCRIPTION

- Peristaltic pump with flow rate adjustable by trimmer
- Trimmer adjustment 0-100%
- Front cover glass built in SAN
- Reinforced PP body
- Easy installation and minimum maintenance
- Standard 20-260 Vac multi-voltage Power Supply
- 100 % Made in Italy
- CE approved

#### OPTIONAL

- ON / OFF switch
- SCHUKO plug



#### TECHNICAL SPECIFICATIONS

Standard	Flow Rate		Pressure		Hose material	Hose dimensions [mm]	RPM
	[l/h]	[cc/min]	[Bar]	[PSI]			
1,5- 01	1,5	25	01	14,7	Santoprene	5,8 x 9,4	10
04- 01	04	66,67	01	14,7	Santoprene	5,8 x 9,4	30
06- 01	06	100	01	14,7	Santoprene	5,8 x 9,4	50
01- 03	01	16,67	03	44,1	Silicone	5 x 10	10
01- 02	01	16,67	02	29,4	Tygon	6,4 x 9,6	10
0,5- 03	0,5	8,34	03	44,1	Santoprene	4,8 x 9,6	5
01- 03	01	16,67	03	44,1	Santoprene	4,8 x 9,6	10
02- 03	2	33,4	03	44,1	Santoprene	4,8 x 9,6	20
12- 01*	12	200	01	14,7	Santoprene	5,8 x 9,4	102
20- 01**	20	334	01	14,7	Santoprene	5,8 x 9,4	160

\* Flow reduction of approximately 20% to minimum voltage (20 Vac).

\*\* Flow reduction up to 50% by feeding the pump with a voltage lower than 110 Vac. Minimum supply voltage required 30 Vac.




**MP2-R 20**  
**230VAC**



**PERISTALTIC PUMP WITH ON/OFF TRIMMER 0-100%**

**PUM VIEW (MM)**

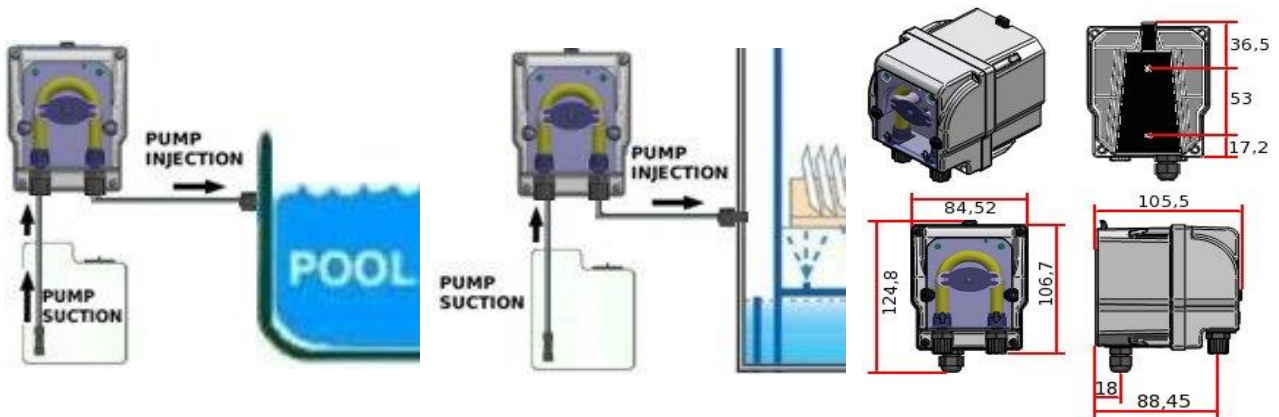

**Dosita S.r.l.**

[www.dosita.com](http://www.dosita.com) - [info@dosita.com](mailto:info@dosita.com)

e-shop: [www.trattamento-acque.net](http://www.trattamento-acque.net) - [info@trattamento-acque.net](mailto:info@trattamento-acque.net)