

# MP2 SPEEDY REDOX

## PERISTALTIC PUMPS WITH REDOX CONTROLLER

### DESCRIPTION

- Peristaltic pump with built in REDOX / ORP controller
- Suitable to dose oxidizing chemicals
- Easy Set Point programmable between 300 e 900 mV REDOX range
- Semi-automatic calibration with buffer 468 mV
- REDOX values showed on the display in real time
- Proportional dosing
- ON / OFF function
- Reinforced PP body
- Polycarbonate front panel
- IP 55 Protection Degree
- Standard Power Supply 230 Vac
- 100 % Made in Italy
- CE approved

### OPTIONAL

- SCHUKO plug
- ON / OFF switch





### TECHNICAL SPECIFICATIONS

| Standard | Max l/h | Pressure |      | Max cc / min | Santoprene tube | Box | Power [Watt] | RPM | Weight |     |
|----------|---------|----------|------|--------------|-----------------|-----|--------------|-----|--------|-----|
|          |         | Bar      | PSI  |              |                 |     |              |     | kg.    | Lbs |
| 03- 01   | 03      | 01       | 14,7 | 50           | 5,8 x 9,3       | PP  | 35           | 10  | 0,5    | 1,2 |





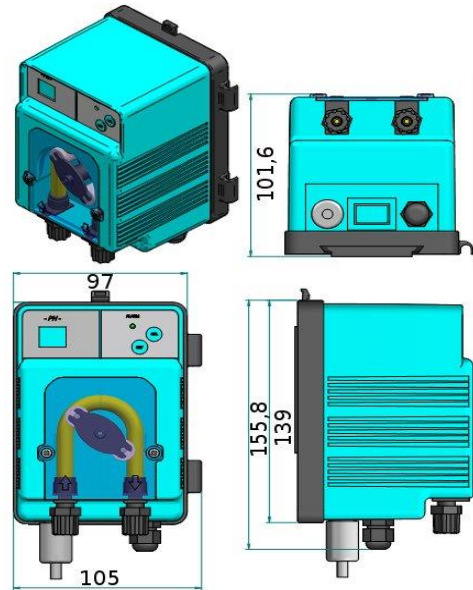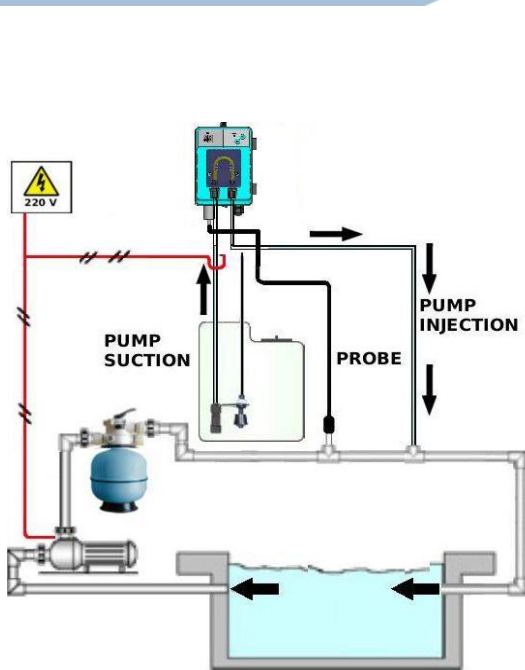


# MP2 SPEEDY REDOX

## PERISTALTIC PUMPS WITH REDOX CONTROLLER

### PUMP VIEW (MM)



### ACCESSORIES

| STANDARD KIT  |   |   |   | INSTALLATION KIT SOLD SEPARATELY  |   |   |                         |
|---|---|---|---|---|---|---|-------------------------|
| INJECTION VALVE<br>1/2" PP-VL-VT  | PP FOOT FILTER  | 2mt PE 4x6 DELIVERY TUBE  | 2mt PVC 4x6 SUCTION TUBE  | REDOX electrode<br>3 mt. Cable epoxy body   | REDOX buffer solutions<br>468 mV  | Nr. 2 saddle clamps<br>d.50 att. 1/2"   | Probe holder<br>1/2" PP |
|  |  |  |  |  |  |  |                         |