

MP2 SPEEDY PH

PERISTALTIC PUMPS WITH PH CONTROLLER

DESCRIPTION

- Peristaltic pump with built in controller
- Suitable for acid chemicals dosing
- Set Point easy calibration between 6.0 - 8.0 PH interval
- Calibration on one value 7.00 PH
- PH values showed on display in real time
- Set point proportional dosage with ON/OFF timings of 150 seconds
- Overdose or end-product time alarm
- Probe's health state detection
- Digital display and segments
- Dosage and state led alarm
- Standard Power Supply 230 Vac 50-60 Hz
- Reinforced PP body
- SAN glass front cover
- PBT roller holder with 2 rollers
- Easily programmable and minimum maintenance
- IP 55 protection degree
- CE approved

OPTIONAL

- ON / OFF switch
- SCHUKO plug





TECHNICAL SPECIFICATIONS

Standard	Flow		Pressure		Tube material	Tube measures [mm]	RPM
	[l/h]	[cc/min]	[Bar]	[PSI]			
1,5 - 01	1,5	25,00	1	14,5	Santoprene	5,8 x 9,4	10

MP2 SPEEDY PH

PERISTALTIC PUMPS WITH PH CONTROLLER

PUMP VIEW (MM)

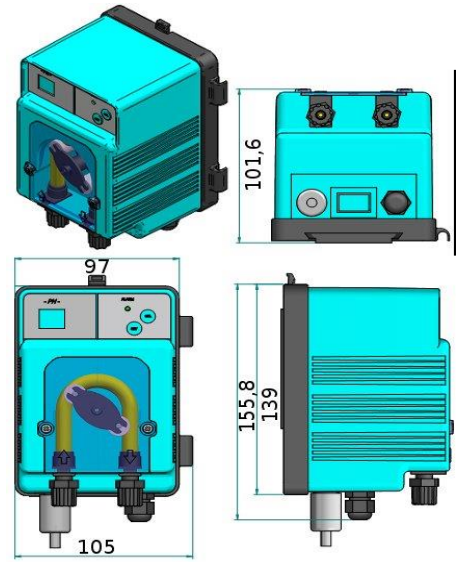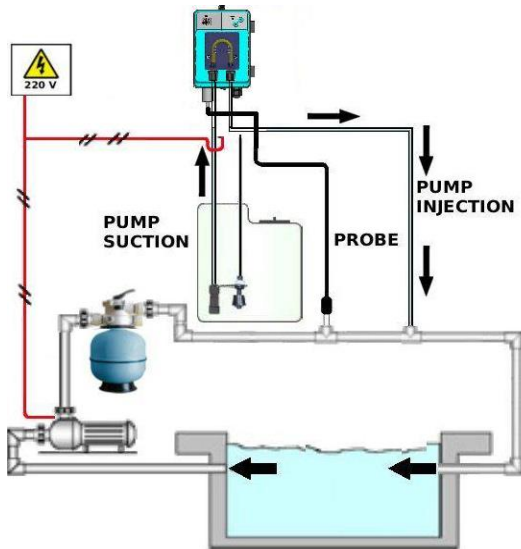

KIT ACCESSORIES								
STANDARD KIT				INSTALLATION KIT SOLD SEPARATELY				
Nr. 1 Injection valve 1/2" PP-Lip valve-Viton®	Nr. 1 Aspiration filter 1/2" PP-injection valve-Viton®	Nr. 1 Delivery tube 2mt PE 4x6	Nr. 1 Suction tube 2mt PVC 4x6		Nr. 1 PH cable electrode 5 mt. Epoxy body	Nr. 1 Buffer solution (pH 7)	Nr. 2 Gripping collars Ø50 att. 1/2"	Nr. 1 Pipe probe holders 1/2" pp
